



Blade Exit Sign

Code: BL/310/M/BK/865/I

CQR LED Emergency Blade Exit Sign c/w Arrow Down Legend – Black

CQR Emergency Exit Signs are available in black and white with 5 in 1 functionality mounting. Wall and Surface mount your exit signs as standard with optional kits for recessed, flag and suspension mounting.

Features & Benefits

- 5 in 1 emergency exit sign
- Maintained & Non-maintained optionality as standard
- Includes arrow down legend
- Other legends available separately
- Wall and surface mount as standard
- Kits available for: recessed/flag & suspension mounting options
- LED indicator and test button
- Manual test and Self-test options available
- Available in white and black

CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH

Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311

sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27



Technical Data

IP Rating	20
-----------	----

Electrical

Battery	LiFePO4 3.2V 1100mAh
Voltage / Frequency	AC 220-240V 50/60Hz
Running Current (A)	0.04
Charging Power (W)	0.8
Emergency Power (W)	0.7
Power Factor	0.35
Inrush Current (A / us)	4.5
Electrical Class	2

Features

Mounting Method	Ceiling / Recessed / Suspended / Flag / Wall
-----------------	--

Photometric Data

Emergency Mode Lumens	24
CCT (K)	6500
Beam Angle	235°
Lumen Maintenance L80 (Hrs)	50000
CRI	80

Emergency

Emergency Duration (Hrs)	3
Maintained / Non-Maintained	Maintained & Non-Maintained
Self-Test	No
Recognition Distance	30


Mechanical

Mounting Method	Ceiling / Recessed / Suspended / Flag / Wall
Housing Material	Polycarbonate
Dimensions (LxWxH mm)	313x212x42

Warranty

Product Warranty	5
------------------	---



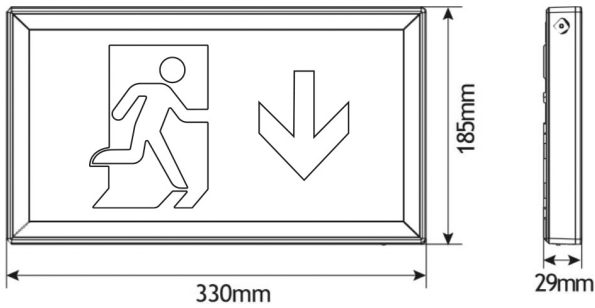

210mm x 310mm

C Halfplanes
180.0 — 0.0
270.0 — 90.0

Flux 23 lm
Maximum 219.53 cd/klm
Position C=90.00 G=55.00
Efficiency: 100.02%
Date: 15-02-2022
Asymmetrical

