



Bulkhead Max

Code: BM/10/NM/WH/865

Max Emergency Bulkhead, 10W, Non-Maintained, IP65



CQR Emergency Bulkheads are available in 150lm, 1000lm & 1500lm variants with options available for standard and recessed mounting. Both fitting types are also available with manual or optional self-test functionality for easier maintenance.

Features & Benefits

- High Output Emergency Bulkhead: 1000/1500lm
- IP66: Ideal for high installations such as plant rooms or lift shafts
- Integrated gear tray into diffuser for easy install
- Non-maintained
- Manual test / Self-test selectable
- Emergency power: 6W/10W & 1000/1500lm
- 5 years warranty: full fitting and battery



CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH
Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311
sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27



Technical Data

IP Rating	65
-----------	----

Electrical

Battery	LiFePO4 6.4V 6600mAh
Voltage / Frequency	AC 220-240V 50/60Hz
Running Current (A)	0.05
Charging Power (W)	4.5
Emergency Power (W)	10
Power Factor	0.3
Inrush Current (A / us)	13A / 100us
Electrical Class	2

Features

Mounting Method	Surface
-----------------	---------

Photometric Data

Emergency Mode Lumens	1000 / 1500
CCT (K)	6500
Beam Angle	135°
Lumen Maintenance L70 (Hrs)	50000
CRI	80

Emergency



Emergency Duration (Hrs)	3
Maintained / Non-Maintained	Non-Maintained
Self-Test	No

Mechanical

Mounting Method	Surface
Housing Material	Polycarbonate
Dimensions (LxWxH mm)	321x167x83

Warranty

Product Warranty	5
------------------	---

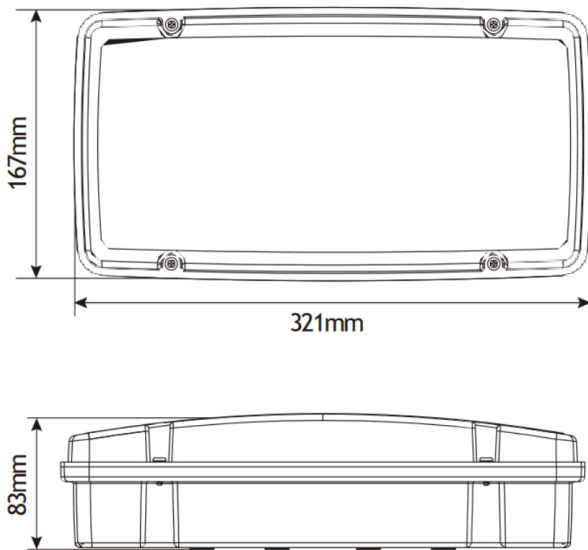

Flux 1587 lm
Maximum 303.56 cd/klm
Position C=270.00 G=25.00
Efficiency: 100.00%
Date: 16-03-2022
Asymmetrical

