

PFM791

HD Video Isolator



Features

- HD video isolator, to solve the HDCVI image interference caused by ground loops effectively;
- Apply to indoor or in junction box;
- Working Temperature: -20~55°C.


Specifications

Model	PFM791
Properties	
Insertion loss	0.5dB
Frequency response	0-65MHz
Input impedance	75Ω
Out impedance	75Ω
Isolation voltage	800V(min.)
Isolation resistance	100MΩ
Protection	
ESD protection	Contact discharge: 600V Air discharge: 8000V Per IEC61000-4-2
Surge protection	4KV 10/700us, per IEC61000-4-5
Reliability	
MTBF	>20000h
Physical Properties	
Dimension(L*W*H)	Body: 42mmx22.5mmx16mm Length: 400mm


PFM791

Outer shell	ABS
Color	Black
N.W.	38g
Environmental	
Working temperature	-20°C ~ 55°C
Storage temperature	-40°C ~ 70°C
Relative humidity	0~95%

Dimensions (mm)

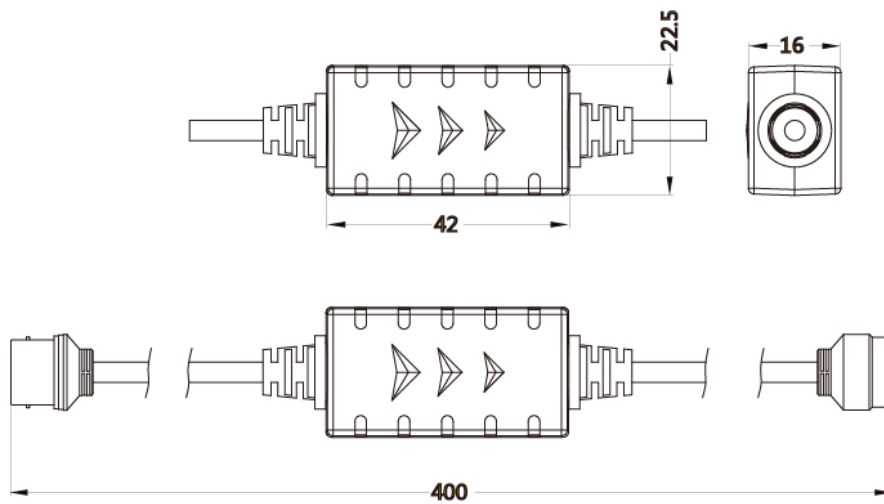

Application



Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.